



Video Web Server : CamPlug™

**Features**

- ▶ 6 ch Video web server performing Real time monitoring through Internet or Intranet
- ▶ Remote surveillance, monitoring and alarm management via Network
- ▶ Self contained system (Non-PC)  
(RISC processor & RTOS built-in, Remote upgrade)
- ▶ Real-time hardware image compression
- ▶ Misc. : Image save/retrieval function at a remote PC (Plug-in)
- ▶ Local and Remote Pan/Tilt/Zoom Camera Control
- ▶ Central management up to 36 CamPlug




**GWS-610N / GWS-610P**


**Technical Information**

Model	GWS-610N / GWS-610P
Video Input	6ch Composite Video Input, BNC
Video Format	Support 6EA, Web-Admin.
System Config.	TCP / IP Based HTTP Server, Support JPEG Motion Video
Frame Size	CCIR601 (720x480), CIF (320x240), QCIF (176x120)
Camera Control	Pan/Tilt/Zoom, Modem/Console port
LAN Interface	10/100Mbps Ethernet port(RJ45)
Leased-line Interface	V.35, Max. E1 Level Speed(CSU/DSU Connection)
Hardware Spec.	RISC CPU, 2Mbytes F.Memory, 8Mb RAM
Communication Port	1 LAN (10/100Mbps), 1 COM (RS-232 Console or Modem Port), 1 PTZ (RS-232 or RS-485 PTZ Control)
Protocol	HTTP, FTP, TCP/IP, ARP, RARP, PPP, PAP, CHAP etc.
Alarm Input	6ch, NO / NC Selectable
Alarm Output	6ch, NO / NC Dual Output (Aux. Output Port)
Video Recording	Hardware Motion JPEG, Max. 30fps/s Compress Speed
Power Source	DC5V / 1A
Operating Temperature	0℃ ~ 40℃
Others	Java Applet Software Video Monitoring Optional Plug-In Software : Video Recording / Playback Self Diagnostic and Remote Booting
Weight	Approx. 2,2kg
Dimensions (WxHxD)	310 x 55 x 202 mm

**Dimensions & Connections**

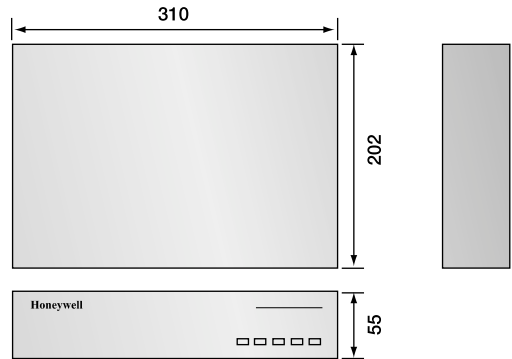

(Unit : mm)

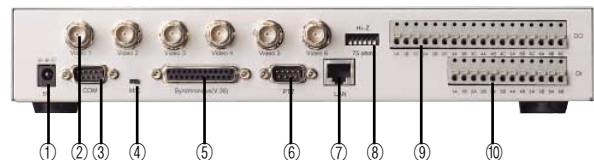

- ① Power Input
- ② VIDEO Input
- ③ COM Port
- ④ M/C Switch
- ⑤ Synchronize (V.35)
- ⑥ PTZ Control Port
- ⑦ LAN Port
- ⑧ 75/Hi-Z Switch
- ⑨ Alarm Input
- ⑩ Alarm Output