

HCC-505 Series

HCC-505N-G

1/3", 480TVL, 0.3 lx, NTSC, DC12V

HCC-505P-G

1/3", 480TVL, 0.3 lx, PAL, DC12V




Lens not supplied with camera

KEY FEATURES

- Digital Signal Processing
- 1/3" IT Color CCD
- S/N ratio more than 50dB
- 480 TV Lines horizontal resolution
- Minimum illumination of 0.3 lx
- DC12V

CONNECTIONS

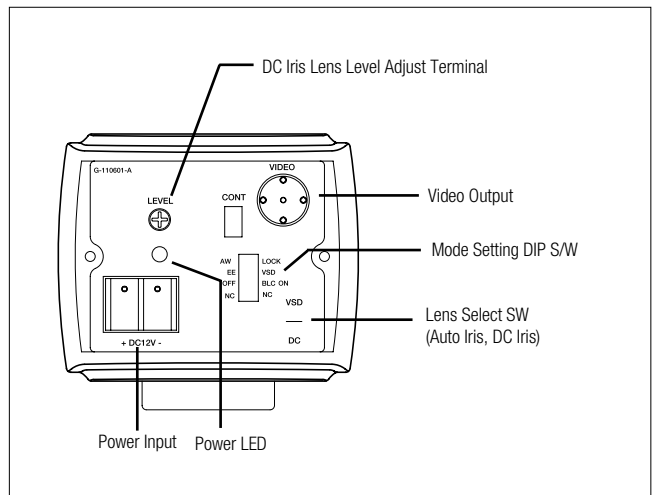

SPECIFICATIONS

Model No.	HCC-505N	HCC-505P
Pick-up Device	1/3" Interline Transfer Color CCD	
Effective Pixels	771(H) x 492(V)	753(H) x 582(V)
Television System	NTSC	PAL
	525 TV Lines, 2:1 Interlace	625 TV Lines, 2:1 Interlace
Sync. System	Internal	
Horizontal Resolution	480 TV Lines	
Minimum Illumination	0.3 lx (F1.2, 30 IRE)	
Shutter Speed	1/60 ~ 1/10k sec.	1/50 ~ 1/10k sec.
Lens Control	EE / VSD / DC Iris	
Electronic Exposure	ON / OFF switchable	
S/N Ratio	More than 50dB	
AGC	On	
White Balance	Auto(Range : 2,800°k~8,000°k) / AWB Lock	
BLC	ON / OFF switchable	
Video Output	Composite(1.0Vp-p), 75 Ω	
Power Source	DC12V ± 2V	
Power Consumption	Maximum 1.8W	
Connector	Video Output	BNC
	Lens Connector	4-pin connector
Operating Temperature	-10°C ~ 50°C	
Storage Temperature	-20°C ~ 70°C	
Operating Humidity	Under 90 % RH (Non-condensing)	
Lens Mount	C/CS Mount	
Camera Mount	Locking holder included	
Material	Aluminum	
Color	Ivory	
Weight	340g	
Dimensions	68(W) x 56(H) x 120(D) mm	
Certification	FCC (HCC-505N), CE (HCC-505P)	

DIMENSIONS

